

Wave i4

Z-Wave™ 4 digital inputs controller

Wave i4 is a 4-digital inputs device (110-240 V AC) that controls other devices within the Z-Wave network. It allows you to manually activate or deactivate (e.g. with a switch) any created scene, run synchronized actions, or execute complex trigger scenarios. Wave i4 supports up to 3 different automation actions per button (up to 12 in total), which makes it very convenient for quick manual control over a group of devices.




ADVANTAGES

- Manually control other Z-Wave devices (e.g. with a multi-button switch).
- Multi-click – activation of **up to 12 actions**.
- Latest technology: **Z-Wave 800 Series**.
- **Extended wireless range** – up to 40 m indoors.
- **SmartStart** for the automatic set-up.
- **OTA Firmware update** for over-the-air updates.
- **S2 Security** authenticated.
- **Security Vault™** ensures the highest level of security with features, such as secure boot, secure key management, secure debug, and more.
- Extremely **low energy consumption**: less than 0.2 W.
- **Small size** ensures the simplest installation behind wall switches.
- Works with **Z-Wave certified gateways (hubs)** and **over 4000 Z-Wave devices**.

Wave i4 is an **input reader device** (it does not contain relays).

TECHNICAL SPECIFICATIONS

Power supply AC	110-240 V, 50/60 Hz
Power supply DC	No
Power consumption	< 0.2 W
Overload protection	No
Power measurement	No
Working without a neutral line	No
Number of inputs	4
Distance	up to 40 m indoors (131 ft.) (depends on local condition)
Z-Wave repeater	Yes
CPU	Z-Wave S800
Z-Wave frequency band	868,4 MHz
Maximum radio frequency power transmitted in frequency band(s)	< 25 mW
Size (H x W x D)	37x42x16 ±0.5 mm / 1.46x1.65x0.63 ±0.02 in
Weight	17 g / 0.6 oz
Mounting	Wall console
Screw terminals max. torque	0.4 Nm / 3.5 lbin
Conductor cross section	0.5 to 1.5 mm ² / 20 to 16 AWG
Conductor stripped length	5 to 6 mm / 0.20 to 0.24 in
Shell material	Plastic
Color	Orange
Ambient temperature	-20°C to 40°C / -5°F to 105°F
Humidity	30 % to 70 % RH

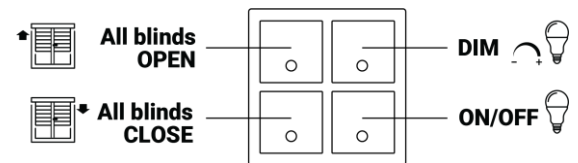

WIRING DIAGRAMS

110-240 V AC

